



i3PROJECTOR L3002UW

LASER TECHNOLOGY

EXTREME LONG LIFETIME, WITHOUT COMPROMISING ON COLORS AND BRIGHTNESS

i3PROJECTOR L3002UW is an Ultra-Wide projector without lamp! This next generation widescreen lamp-less projector offers numerous improvements over previous generations and a significantly lower total cost of ownership. Offering a brightness of 3000 lm and a light source lifetime of 20.000 hours, this is the ideal projection solution for classrooms and meeting rooms.

INTERACTIVE

- The perfect combination with an i3Board 135"

INSPIRING

- Huge image size
- Laser technology
- Lamp life 20.000hrs
- Ultra short-throw projector
- Instant On / Off (5sec)
- Green design: Mercury free
- Wide color range

INTEGRATED



- 3000 Lumen
- UW 1920x720
- Aspect ratio 16:6
- Speaker 10W
- DLP Technology

WARRANTY

- 3 years on the projector
- 3 years (max. 10.000 hours) on the light source *

*extendable to 5 years




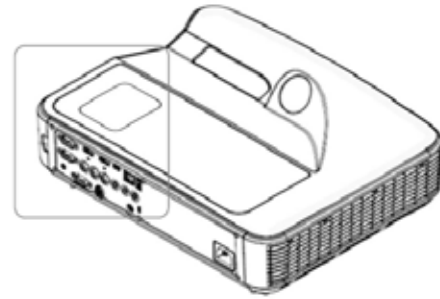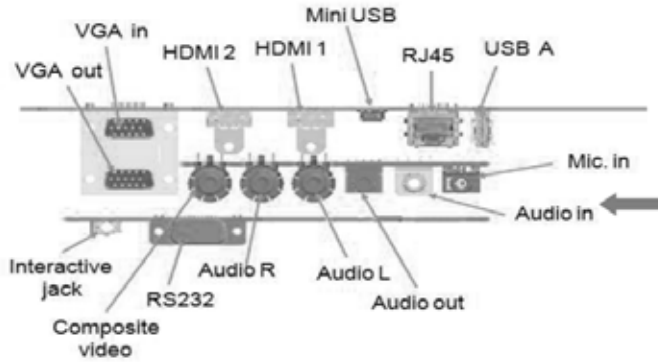

SPECIFICATIONS

| | |
|--|--|
| Laser light source LASER with 20,000hrs lifetime | |
| Brightness | 3000 lumens |
| Contrast | 1,800:1 (native) / 10,000:1 (APM) |
| Resolution (native) | 1920 x 720 |
| Aspect ratio (native) | 16 : 6 |
| Throw ratio | 0.25 |
| Focus range | 120" - 140" |
| Temperature/ Humidity | Operating : 5°C ~ 40°C / 5%~90% without condensation Storage : 0°C ~60°C / 5%~95% without condensation Shipping :- 20°C ~ 60°C / 5%~95% without condensation |
| Temperature / Altitude | Operation 5°C~40°C @ 0~2,500 feet 5°C~35°C @ 5°C~30°C @ 5,000~10,000 feet |
| Thermal Protection | Auto shutdown : Ambient temperature exceeds 47±2°C Auto ECO : Ambient temperature exceeds 40°C |
| Noise level | Full mode : 36dBA (typical) / 38dBA (maximum) ECO mode : 32dBA (typical) / 35dBA (maximum) |
| HDMI input | Qty : 2 (HDMI1 with MHL2.0 support) HDMI : 1.3a HDCP : 1.3 Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz) |
| VGA input | Qty : 2 (1 sharing with VGA output by OSD setup) Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz) |
| Composite input | Qty : 1 / RCA (yellow) Video Standard : 480i/576i |
| VGA output | Qty : 1 (Sharing with one of VGA input by OSD setup) Loop through VGA input |

| | |
|---------------------------|--|
| VGA audio input | Qty : 1 / 3.5mm phone jack (blue) / stereo (dedicated to selected VGA input port) |
| Composite audio input Qty | 2 / RCA-Left (white) / RCA-Right (red) / stereo |
| Microphone input Qty | 1 / 3.5mm phone jack (pink) / mono |
| System audio output Qty | 1 / 3.5mm phone jack (green) / stereo |
| RS232 | Qty : 1 / DB-9 female / 9600bps Purpose : projector control |
| Mini USB | Qty : 1 / device mode Purpose : for firmware upgrade (USB1.0) / interactive (USB2.0) |
| RJ45 | Qty : 1 / Fast Ethernet (100Base-T) Purpose : remotely projector control (Crestron / AMX / PJ-Link) Others : video streaming |
| USB A | Qty : 1 / host mode / USB2.0 (for local playback or Wi-Fi dongle) |
| Speaker | 1 x 10W |
| Power consumption | 335W (Full mode), 225W (Eco mode) |
| Standby power | (1) Idle without LAN wakeup : < 0.5W (2) Idle with LAN wakeup : < 8W |
| Dimensions | Width x Depth x Height = 383mm x 308mm x 86mm |
| Weight Net | 5.5kg (12.11lb) |
| EMC | CE, FCC, CCC |
| Safety | TUV, UL, CCC |
| Green | RoHS, WEEE, REACH |
| Cable | AC power cord 3m x1 VGA cable 1.8m x1 |
| Remote control | |
| User Manual | CD x1 |
| Quick Start Guide | QSG x1 |

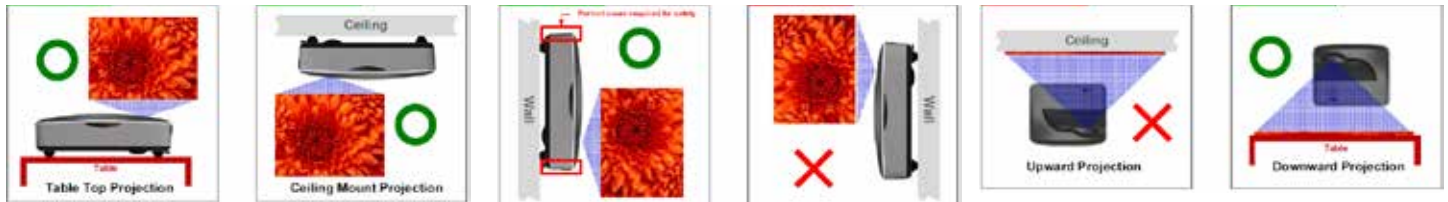

AUTHORISED DISTRIBUTOR
